

Datasheet

Tapo Smart Hub





Highlight

Connects Up to 64 + 4 Devices

Build your smart home ecosystem with up to 64 sensors, Sub-1G switches* or buttons + 4 cameras or video doorbells (Tapo C420, Tapo C400, and Tapo D230) connected. Easily and remotely control all of your devices from anywhere, at anytime through Tapo app.




*Tapo H200 only supports sub-1G devices working in specified frequency bands: 863.35MHz, 864.35MHz, 868.35MHz (for EU/UK) or 920.9MHz, 921.7MHz, 922.3MHz (for US/AU). Note: Tapo H200 can only be used indoors and needs to be matched with other Tapo smart devices (sensors, buttons, Sub-1G switches, cameras, and video doorbells, purchased separately).



Smart Alarm & Chime

Use the hub as a smart alarm or chime to protect your home security by coordinating with your Tapo smart cameras, video doorbells, sensors, and more.[△]

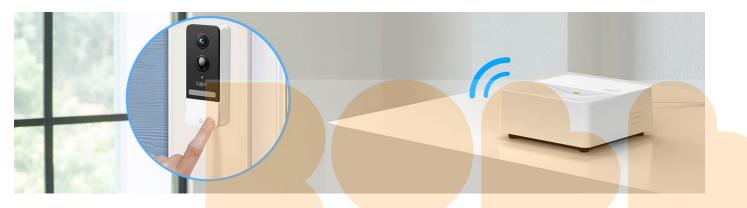

Local microSD Storage (Up to 512 GB)

Save recorded videos from your smart cameras and doorbells to a microSD card⁺ (up to 512 GB).





[†]microSD card purchased separately.

^ASmart sensors or buttons sold separately.

Note: Tapo H200 can only be used indoors and needs to be matched with other Tapo smart devices (sensors, buttons, Sub-1G switches, cameras, and video doorbells, purchased separately).



Features

· Ultra-Low-Power Performance

An ultra-low-power wireless protocol extends your usage and ensures your battery-powered devices work longer.

Reliable Smart Actions

Create smart actions and enjoy reliable hands-free home automation by using the hub with other Tapo smart devices.

Real-Time Notifications'e love smart

Monitor your entire home and all connected devices to get instant alerts when the activity is detected.

Device Sharing

Easily share management permissions with each member of your family.

19 Ringtone Options

Multiple built-in ringtones(bark, siren, doorbell, and more) and adjustable volume for your customized scenarios.

· Voice Activated

Works with Amazon Alexa and Google Home to control sensors, cameras or other Tapo devices with your voice.

Schedule & Timer

Set customized schedules for your smart sensors, cameras, or other Tapo devices to get an automatic smart life.

Datasheet



Specifications

- Button: Reset/SYNC Button
- Wireless: 2.4 GHz Wi-Fi, Sub-1G*
- · Adapter Input: 100-240 V, 50/60 Hz, 0.3A
- · Adapter Output: 9V , 0.85A
- Dimensions (L x W x H): 2.8 x 2.8 x 1.2 in. (71.45*71.45*31.25mm)
- · Package Contents:


Таро Н200

Quick Start Guide

- RJ45 Ethernet Cable We DC Power Adapter
- · Certifications: CE, RoHS, RCM,
- Operating Temperature: 0°C 40°C (32°F-104°F)
- Storage Temperature: -20°C ~60°C (-4°F~140°F)
- · Operating Humidity: 10%~90%RH, Non-condensing
- · Storage Humidity: 5%~90%RH, Non-condensing

*Tapo H200 only supports sub-1G devices working in specified frequency bands: 863.35MHz, 864.35MHz, 868.35MHz (for EU/UK) or 920.9MHz, 921.7MHz, 922.3MHz (for US/AU). Note: Tapo H200 can only be used indoors and needs to be matched with other Tapo smart devices (sensors, buttons, Sub-1G switches, cameras, and video doorbells, purchased separately).

Device Appearance



1 SYNC Button

Press to pair with the camera/video doorbell/sensor/button/Sub-1G switch, or silence the hub when it rings.

2 RESET

Use a pin to press and hold for about 5 seconds until the hub LED quickly blinks red to reset the hub.

3 microSD Card Slot

Insert a microSD card to record camera videos locally. Initialize the microSD card within the Tapo app first. •microSD card not included.

4 Status LED

Indicate the status of your hub.

Notes:Connect up to 4 cameras or video doorbells to a hub.

For more information, please visit https://www.tapo.com/ Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. ©2023 TP-Link