



HEATIT WiFi6 THERMOSTAT WHITE RAL 9010

Wi-Fi thermostat 3600W 16A

Art.no 5430541

GTIN 7071236018100

Heatit WiFi6 is an electronic thermostat designed for electrical heating. The thermostat can be controlled using the "MyHeatit" App via Wi-Fi, Bluetooth (BLE), or by the buttons on the front of the thermostat. The thermostat has a user friendly interface.

Heatit WiFi6 has 3 modes; Heat - Cool and Eco.

The thermostat fits in standard European junction boxes and may be used with most System 55 frames. It has a sturdy metal frame for secure fastening on the junction box. The thermostat has a built-in room temperature sensor. Two additional external temperature sensors may also be connected. The device has an open API and supports Amazon Alexa and Google Home (open API, Amazon Alexa and Google Home is pending).

The thermostat can communicate over a local API, where the user can make integration with a local gateway, server, controller that offers such a service.

The installer can configure and set up the system via Bluetooth. After the system is set up, the installer can transfer the property to the customer. The customer can then transfer the system to their Wi-Fi network.

Heatit WiFi6 has active power metering and it gives you real time information about your power consumption. It also allows you to set the power metering value manually in case of connection with a contactor.

The device has implemented ZeroX technology. This technology makes sure the relay switches at 0V when turning on and off. With this technology the thermostat will have a much longer lifetime.

PRODUCT FEATURES

- Wi-Fi/BLE thermostat
- Internal room sensor
- External room sensor (wired by cable)
- Floor sensor
- Power regulator
- Temperature limiter
- 3 modes; Heat - Cool and Eco
- Hysteresis/PWM
- Temperature calibration
- Open window detection
- ZeroX detection
- Relay status icon
- Adjustable display brightness
- Single pole switch
- Lock mode/child lock
- Google Home, Amazone Alexa and open API (pending)
- Weekly schedule in app
- Profiles; Home - Away - Night - Holiday
- Active power metering
- Firmware update (OTA)

THERMOSTAT DATA

Compatible NTC-sensors (kΩ @ 25°C)	6.8, 10, 12, 15, 22, 33, 47, 100
Power regulator	Timed cycle 0-30 minutes
Error margin temperature	0,5°C
Temperature sensitivity	Temperature sensitivity ±0,5
Hysteresis	0,3 to 3,0 (default hysteresis 0,5)
Ohm value at 25°C	10kΩ
Regulation temperature	5 til 40°C

IOT / SMART HOME SPECIFIC DATA

Alternate IoT-communication protocols	Bluetooth® low energy WiFi (802.11 b/g/n) 2,4GHz
Min radio frequency range	30m
Over The Air update (OTA)	Yes
Push buttons	3
Temperature measurement range	5 til 40°C
Primary IoT Protocol	WiFi Bluetooth

ELECTRO TECHNICAL DATA

Voltage	230VAC 50Hz
Max load (resistive load)	3600W
Own power usage	2W
Switch type	One-pole switch
Max load (resistive load Ampere)	16A
Method of regulation	Button regulation Regulation via App
Connection type	Screw clamps
Connection terminals diameter	0.2 til 2.5mm ²
Max tightening torque connections	2N·m
Grounding	No



MAINTENANCE

The device is maintenance-free. Indoor use only.

ADDITIONAL INFORMATION

Approved for use in bathrooms.

ZeroX Detection is pronounced Zero Cross Detection.

PRODUCT INFO RETURN AND RECYCLING

The product must be recycled as electronic waste.

STANDARDS

Certification	RoHS Reach	EN Standards	CE Nemko
IP Code	IP21	Heatit Controls AB declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.	1

WARRANTY

Warranty Norway	5 years	Warranty international	2 years
-----------------	---------	------------------------	---------

LOGISTICAL DATA (F-PACK)

Width	90mm	Height/diameter	70mm
Length	90mm	Weight	217g
GTIN	7071236018100	Unit	EA
Consists of unit	EA	Quantity	1

LOGISTICAL DATA (M-PACK)

Width	205mm	Height/diameter	105mm
Length	375mm	Weight	2240g
GTIN	27071236018104	Unit	CARTON
Consists of unit	EA	Quantity	10

**LOGISTICAL DATA (D-PACK)**

Width	385mm	Height/diameter	550mm
Length	425mm	Weight	23320g
GTIN	37071236018101	Unit	CARTON
Consists of unit	CARTON	Quantity	100

DISCLAIMER

The device can withstand a load of max 16A/3600W at 230VAC. We recommend a contactor for loads above 13A.

Never change the front from one thermostat to another.

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.heatit.com and/or documents.heatit.com


Heatit Controls AB can not be held liable for any type of errors or omissions in our product information.

Product specifications may change without further notice.



HEATIT WiFi6 THERMOSTAT

DIMENSIONS

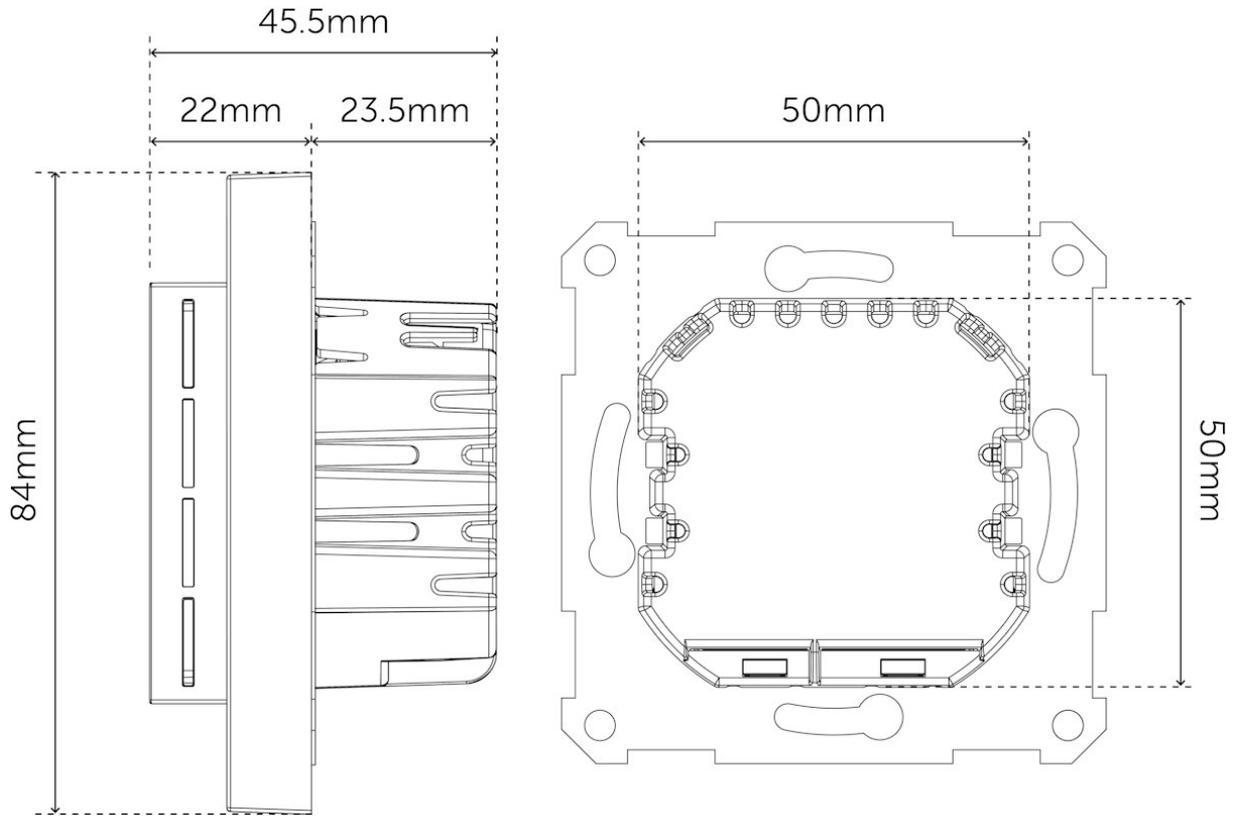

Heatit WiFi6 Thermostat can be ordered from www.heatit.com/5430541

All additional documentation are available on the above adress and on documents.heatit.com/5430541

