



*Feel Life With Digital*



we love smart

## PRODUCT CATALOG

Smart Home Device

### SHENZHEN NEO ELECTRONICS CO.,LTD

Address: East 6/F, Building 2 LaoBing Industry, No.44 TieZai Road,  
Baoan District, Shenzhen, China

E-mail: [helen@szneo.com](mailto:helen@szneo.com)      [sales@szneo.com](mailto:sales@szneo.com)

<http://www.szneo.com>



SHENZHEN NEO ELECTRONICS CO., LTD




# Company profile

Since 2002, Shenzhen NEO Electronics Co., LTD is a high-tech enterprise which focuses on the research, design, manufacture and sales of smart home products. We mainly provide WiFi Smart Devices,Z-Wave Sensors, ZigBee Devices and Wireless IP Cameras.



ISO9001:2008

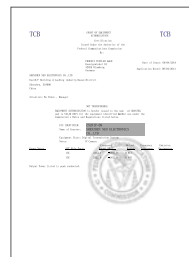

CE


RoHS

RTTE

FCC


ETL

# Smart Home Device

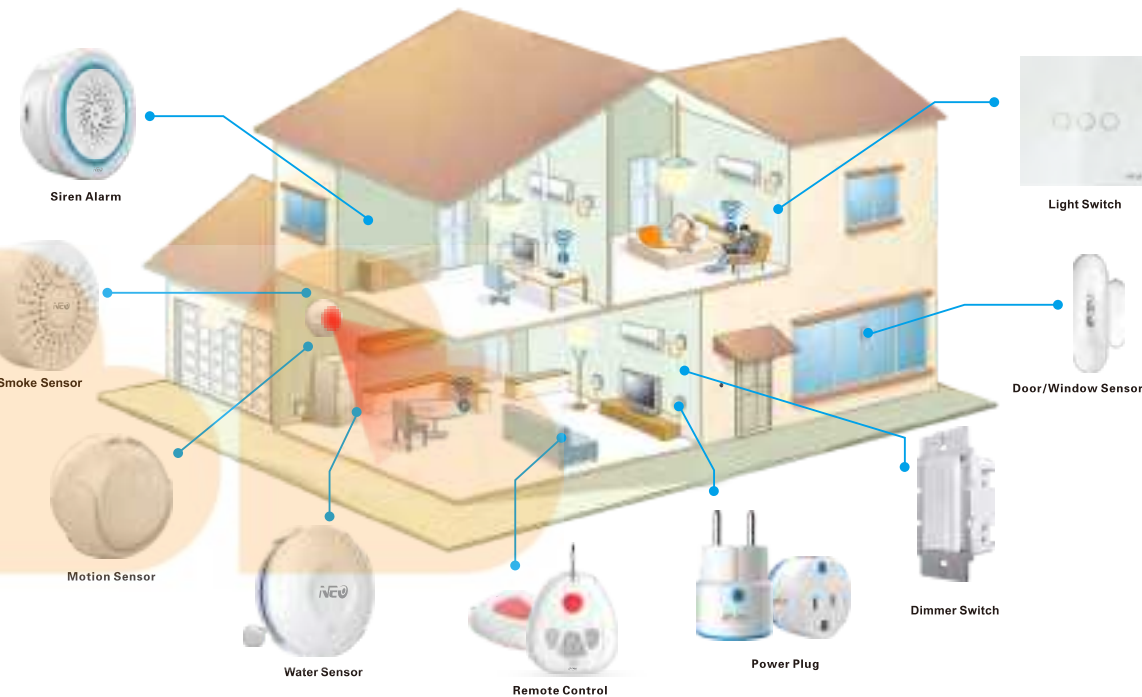

Z-Wave Devices / Compatible with 500 series and 700 series gateway: Fibaro, Vera, Zipato, SmartThings...





### Light Switch EU

- One key ON/OFF lights
- Timing ON/OFF
- App Remote Control
- Rated Voltage: AC 85~240V, 50/60Hz
- Max Current: 1 outputs - Max 5A\*1;  
2 outputs - Max 5A\*2;  
3 outputs - Max 5A\*3.
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Type: 1 / 2 / 3 way
- Product Size: 86mm\*86mm\*34mm

### Light Switch US

- One key ON/OFF lights
- Timing ON/OFF
- App Remote Control
- Rated Voltage: AC 85~240V, 50/60Hz
- Max Current: 16A/channel
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Type: 1 / 2 / 3 way
- Product Size: 74mm\*37mm\*120mm

we love smart



NAS-SC01W



NAS-SC02W







### ➔ Dimmer Switch EU

- Timing switch, Intelligent open, Adjust lighting intensity
- Power metering
- Widely compatible with Mos-FET
- Input: AC 85~240V, 50/60Hz
- Output: 200W
- Over-temperature protection: 90°C
- Operate mode: touch screen
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 86mm\*86mm\*34mm



NAS-DM01W



### ➔ Dimmer Switch US

- Timing switch, Intelligent open, Adjust lighting intensity
- Power metering
- Widely compatible with Mos-FET
- Input: AC 85~240V, 50/60Hz
- Output: 200W
- Over-temperature protection: 90°C
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 110mm\*58mm\*50mm



NAS-SC03W

## WiFi Smart Device



WiFi

### Light Switch US

- One key ON/OFF lights
- Timing ON/OFF
- Input Power:100~120VAC 60Hz
- Control:Relay
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Control Channel:1CH Max
- Current:15A Standby
- Power:≤0.5W
- Button Life:500K times
- Product Size:105mm\*45mm\*45mm



Amazon alexa



Google Assistant



NAS-SC05

### Dimmer Switch US

- Timing switch,Intelligent open,Adjust lighting intensity
- Power metering
- Widely compatible with Mos-FET
- Input Power:100~240VAC 50-60Hz
- Dimming Control: TRIAC Edge Cut
- Inductive load(LED/CFL):250W Max
- Resistive load(Incandescent):430W Max
- Communication: WiFi 802.11 b/g/n 2.4GHz Control
- Channel:1CH Max Current:7A
- Standby Power:≤0.5W
- Button Life:500K times
- Product Size:105mm\*45mm\*45mm



NAS-DM05



WiFi Dimmer Switch



2.4G WiFi



Dimming Light



Multi-platform Support



Mechanical Push On/Off Button



## WiFi Smart Device

WiFi



we love smart



NAS-WR07W

### Power Plug(EU/FR)

- One key ON/OFF appliances
- Timing ON/OFF
- Set delayed tasks
- Instant current voltage power and power consumption display with APP
- Rated Voltage: AC 85~240V, 50/60Hz
- Rated Current: EU 10A/16A; FR 10A/16A
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Size: EU 65mm\*43mm\*43mm  
FR 65mm\*43mm\*43mm



WiFi

## WiFi Smart Device



### Power Plug US

- One key ON/OFF appliances
- Timing ON/OFF
- Set delayed tasks
- Instant current voltage power and power consumption display with APP
- Rated Voltage: AC 85~240V, 50/60Hz
- Rated Current: 15A
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Product Size: 81mm\*38mm\*52mm



NAS-WR12W



## WiFi Smart Device



### ➔ Motion Sensor

- Motion detection
- Battery: CR123A x 1
- Standby current: 34uA
- Operate current: 75mA~90mA
- Working time: 1 year (7 times/day); 2 years (3 times/day)
- Sensitivity distance: 6m
- Sensitive angle: 110°
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 48mm\*48mm\*48mm



NAS-PD02W/NAS-PD01W

## WiFi Smart Device




### ➔ USB Motion Sensor

- Motion detection;Push notification to mobile phone;
- With temperature and humidity sensor,it can alarm by app setting
- Anti-demolition function,push notification when device is removed
- Battery:CR123A\*2-3V
- USB Power supply :5V 1A
- Standby current :39.7uA
- Wireless frequency: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wi-Fi range: 45M
- Sensitive angle: 110°
- Sensitive distance: 12m
- Product Size: 68mm\*56mm\*56mm



NAS-PD07W

## WiFi Smart Device

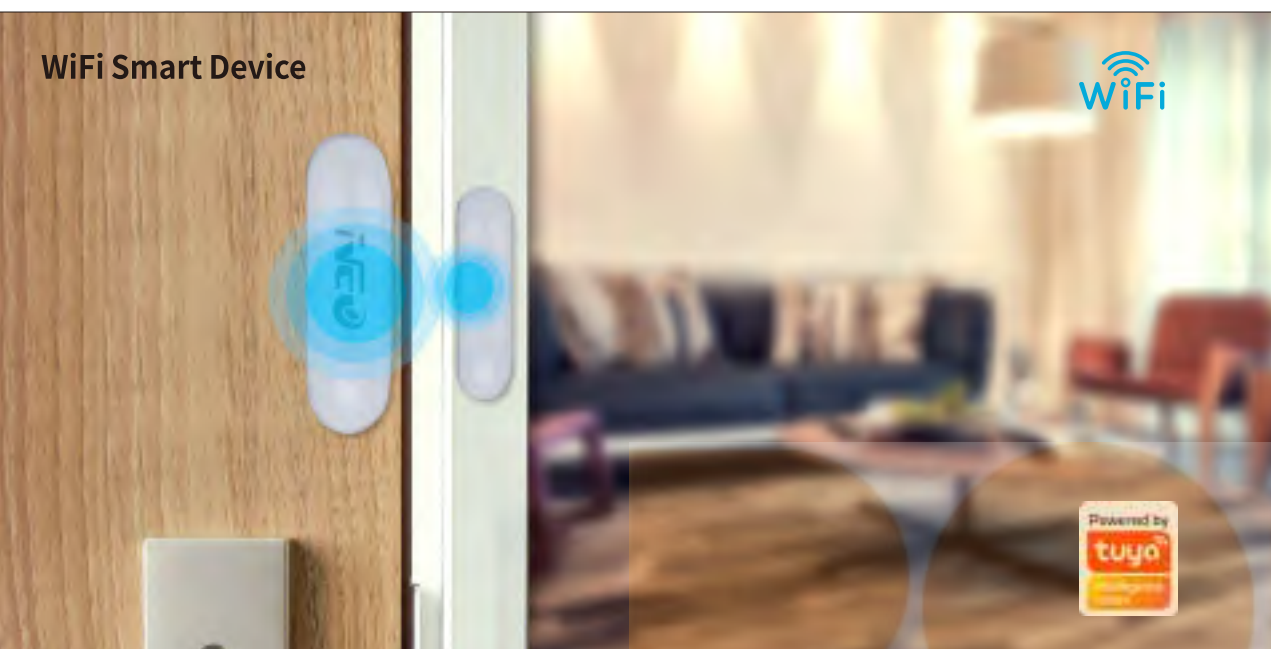

### Door Sensor

- Detect open/close status of the door/window
- Battery: CR2 x 1
- Standby current: 13uA
- Working current: 75mA-90mA
- Working time: 1 year ( 7 times/day )  
2 years ( 3times/day )
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m



#### Product Size

Main body: 71mm\*21mm\*22mm  
Deputy body: 40mm\*11mm\*11mm



NAS-DS01W

#### Product Size

Main body: 66mm\*18mm\*20mm  
Deputy body: 40mm\*10mm\*11mm



NAS-DS03W



## WiFi Smart Device


### USB Door Sensor

- Detect open/close status of the door/window
- Battery type: AA\*2
- Stand by current: 28.4uA
- Trigger current: 43mA
- Pairing current: 37mA
- Working time: 4000 times
- Wireless type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless range: 35M



#### Product Size

Main body: 82mm\*42mm\*16mm  
Deputy body: 82mm\*11mm\*16mm

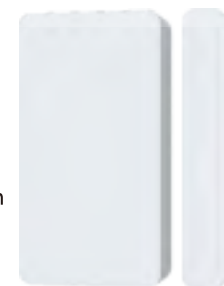

NAS-DS05W

- Detect open/close status of the door/window
- Anti-demolition function and push notification
- Backup Battery: CR123A 3V
- USB Power supply :5V 1A
- Standby current :27.9uA
- Wireless frequency: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wi-Fi range: 45M



#### Product Size

Main body: 87mm\*27mm\*23mm  
Deputy body: 50mm\*13mm\*16mm



NAS-DS07W





### ➔ Siren Alarm 3in1


- Trigger alarm , make sound and light
- Siren with humidity and temperature sensor
- Multiple Sound Selection
- USB Power supply: 5V 1A
- Backup power supply: CR123A x 2 (optional)
- Sound intensity: 90dB
- Wireless Type: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 68mm\*68mm\*32mm



NAS-AB02/03W



Detect temperature, humidity and light intensity  
Push notifications to mobile phones

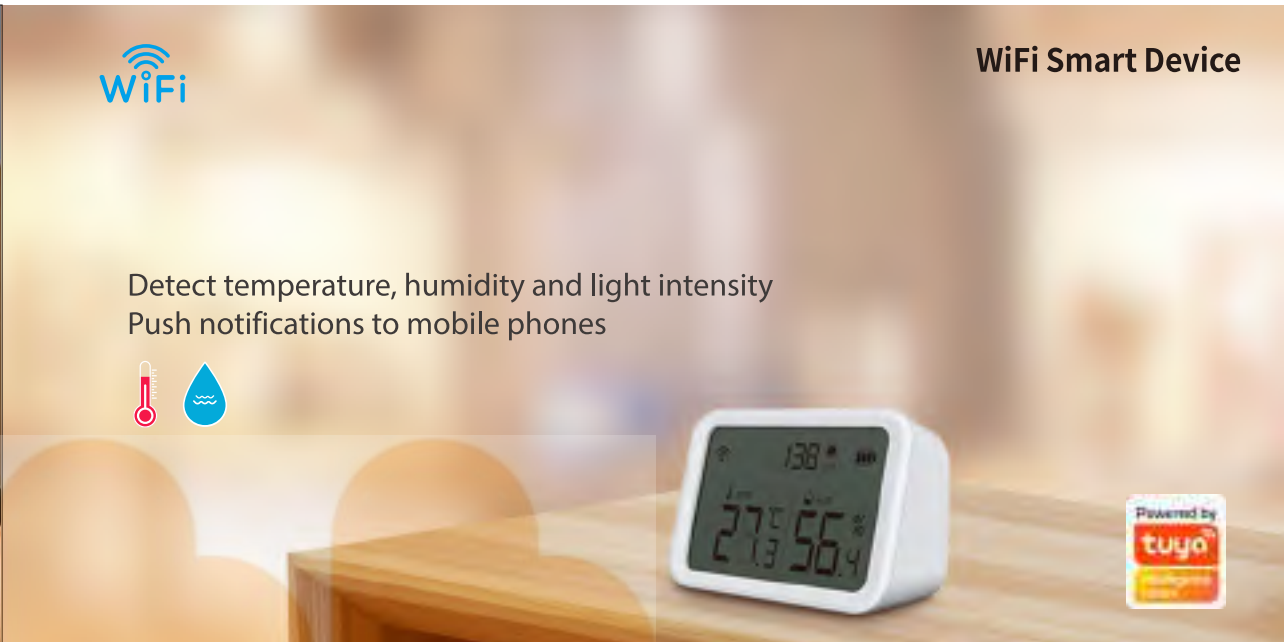

### ➔ Temperature and humidity sensor

- With temperature and humidity sensor
- Detect luminous intensity
- Push notification to mobile phone
- Battery: AA\*2
- Temperature detect range: -20°C ~ 80 °C
- Humidity detect range: 0% ~ 100%
- Luminous intensity detect range: 0Lux ~ 157000Lux
- Working temperature: 0°C ~ 60°C
- Working humidity: 0% ~ 100%
- Bluetooth network: 2.4GHz IEEE801.11b/g/n
- Wireless frequency: 2.4GHz
- Wireless protocol: IEEE 802.11b/g/n
- Network range: 45M
- Product Size: 84mm\*55mm\*32mm




NAS-TH02W





### Water Sensor

- Detect water leakage and push alarm to smartphone
- App remote control
- Battery: CR2 x 1
- Standby current: 1.1uA
- Standby time: 5 years
- Working time: 4 years (2 times/month)
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Protection grade: IP55
- Product Size: 67mm\*67mm\*24mm



NAS-WS02W



### Water Sensor

- Detect water leakage and push alarm to smartphone
- Power: AA\*2
- Working current: 37mA
- Pairing current: 36mA
- Standby current: 23.5uA
- Alarm time: 10 minutes
- Wireless frequency: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wi-Fi distance: 35M
- Product Size: 82mm\*42mm\*16mm



NAS-WS05W

## WiFi Smart Device



### ➔ IR Remote Controller

- Support all infrared devices, including air conditioner, TV, fan, DVD player, etc
- Support Amazon Alexa/Echo/Dot/Google Home
- Learning (DIY)- controls all devices that use infrared signals;
- USB power supply:5V 1A
- Infrared Frequency: 38-56Khz
- Infrared Distance: 7M
- Infrared Angle: 360°
- Max Current: 110mA
- Max Power: 0.55W
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 60mm\*60mm\*19mm



NAS-IR02



## WiFi Smart Device



### ➔ IR Remote Controller

- Support all infrared devices, including air conditioner, TV, fan, DVD player, etc
- Support Amazon Alexa/Echo/Dot/Google Home
- Learning (DIY)- controls all devices that use infrared signals;
- USB power supply:5V 1A
- Infrared Frequency: 38-56Khz
- Infrared Distance: 7M
- Infrared Angle: 360°
- Max Current: 110mA
- Max Power: 0.55W
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 67mm\*67mm\*24mm



NAS-IR03W







### Smoke Sensor

- Detect smoke;issue alert;push notifications to smartphone
- Battery: CR2\*2
- Sleep current: 25uA
- Operating current: 100mA~110mA
- Standby time: 5 years
- Working time: 1 year ( 20 times/day )
- Wireless type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Alarm temperature: >55°C
- Sound intensity: 90db(1M)
- Product Size: 71mm\*71mm\*29mm



NAS-SD01W

we love smart



### Smart Mousetrap

- High voltage shock mouse after triggering
- Easy to install,put at any location you want.
- Battery : 1.5V AA Size × 4 ( 6V )
- Working time: 15times
- Standby current: 22uA
- Max current: 600mA
- Wireless Type: 2.4GHz
- Protocol: IEEE 802.11b/g/n
- Wireless Range: 45m
- Product Size: 222mm\*112mm\*120mm



NAS-MA01W




### Water valve

- Water pressure ,Water Flow , Water Temperature measurement
- One click test for water leakage
- Adapter: Input: 100-240V~ 50/60Hz, 0.3A max; Output: 5V 1.0A
- Wireless standard: IEEE 802.11b/g/n @ 2.4GHz
- Main water supply line: 1" ; 3/4"
- Thread pitch/pattern: 1"-11.5NPS; 3/4"-14NPS
- Water Flow Rate: 1"---0.11~34.3gal/min; 3/4"--0.07~22gal/min
- On/Off time: 8 seconds
- Water pressure: 20-100 psi Accuracy : ±2.5%
- Water Temperature: -10°C ~ 65°C ( 14F ~ 149F )
- Relative humidity: 10-80%
- Product life: >90 , 000 operating hours ( 10 years )
- Product Size: 195mm\*70mm\*90mm



NAS-WV01W

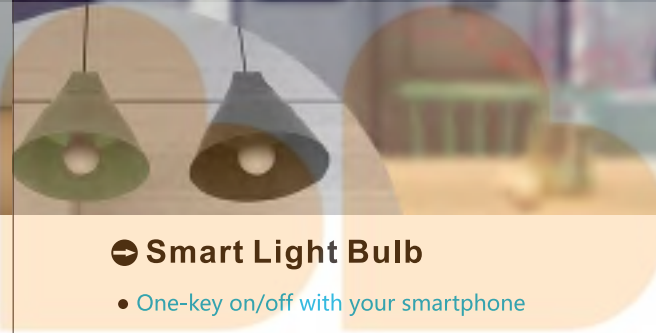

### Smart Light Bulb


- One-key on/off with your smartphone
- Life: 26280 hours
- Luminous color: RGB/white
- Power consumption: 10w
- Wireless frequency: 2.4GHz
- Wireless standard: IEEE 802.11b/g/n
- Wi-Fi distance: 45M
- Product Size: 60mm\*60mm\*113mm



NAS-LB01W



Detect temperature, humidity and light intensity accurately



### ZigBee Gateway

- ZigBee control center,
- Supports adding multiple sub-devices
- USB power supply: 5V 1A
- Working temperature: -10-55°C
- Working humidity: 10%-90%RU
- Storage temperature: -10-55°C
- Storage humidity: 10%-90%RU
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Firmware upgrade: Support OTA
- Product size: 78mm\*78mm\*25mm



NAS-ZW03B

### Temperature and humidity sensor

- With temperature and humidity sensor
- Detect luminous intensity
- Push notification to mobile phone
- Battery:AA\*2
- Temperature detect range: -20°C ~ 80 °C
- Humidity detect range: 0% ~ 100%
- Luminous intensity detect range: 0Lux ~ 157000Lux
- Working temperature:-20°C ~ 80°C (-4°F ~ 176°F)
- Working humidity:0% ~ 100%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product Size: 84mm\*55mm\*32mm



NAS-TH02B





## ZigBee Device



### ➔ Siren Alarm

- Trigger alarm; Make sound and light; Remote on/off via APP
- Siren with humidity and temperature sensor ; Set the temperature and humidity alarm range that automatically alarms
- Backup Battery: CR123A\*2-3V
- USB Power supply: 5V 1A
- Volume: 90db
- Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol : Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product Size: 68mm\*68mm\*33mm



NAS-AB02B



we love smart

## ZigBee Device



### ➔ USB Motion Sensor

- Motion detection; Push notification to mobile phone
- With temperature and humidity sensor, it can alarm by app setting
- Anti-demolition function, push notification when device is removed
- Backup battery: CR123A\*2-3V
- USB Power supply: 5V 1A
- Sensitive distance: 12m
- Sensitive angle: 120°C
- Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: 68mm\*56mm\*56mm



NAS-PD07B



## ZigBee Device



### ➔ Door Sensor

- Detect the open/close status of doors and windows, and push notifications to mobile phones
- Power supply: AA\*2
- Standby current: 6.5uA
- Working temperature: 0°C ~ 40°C
- Working humidity: 20% ~ 85%
- Working times: 5000
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: Main body: 82mm\*42mm\*16mm  
Deputy body: 82mm\*11mm\*18mm



**NAS-DS05B**




### ➔ USB Door Sensor

- Detect the open/close status of doors and windows, and push notifications to mobile phones
- Anti-demolition function, push notification when device is removed
- Backup battery: CR123A 3V
- USB Power supply: 5V 1A
- Standby current: 10.7uA
- Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: Main body: 82mm\*27mm\*23mm  
Deputy body: 50mm\*13mm\*16mm



**NAS-DS07B**



### Water Sensor

- Detect water leakage and push notification to mobile phone
- App remote control
- Battery: CR2-3V
- Standby current: 1.1uA
- Waterproof level: IP55
- Working Temp.: 0°C~40°C
- Working hum.: 20%~85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: 69mm\*69mm\*34mm



NAS-WS02B

- Detect water leakage and push smart phone to alarm
- App remote control
- Power supply: AA\*2PCS
- Working current: 58mA
- Standby current: 2.5uA
- Working temp.: 0°C ~ 50°C
- Working hum.: 20% ~ 85%
- Working times: 5000
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Network range: 55M
- Product size: 82mm\*42mm\*16mm



NAS-WS05B

### Power Plug EU


- One-key on/off, Timing on/off, Set delayed tasks
- Real-time current and voltage, power metering
- Input power: AC 85~240V 50/60Hz
- Maximum current: 16A
- Standby power consumption: 0.5W
- Working temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Working humidity: 20% ~ 85%
- Wireless frequency: 2.4GHz
- Wireless protocol: Zigbee 3.0, IEEE 802.15.4
- Wireless distance: 55M
- Product size: 46mm\*46mm\*71mm



NAS-WR01B



## Z-Wave Device

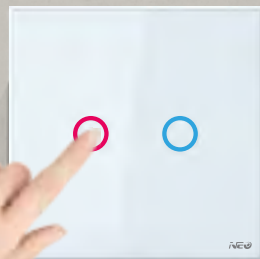


### Light Switch(EU/US)

- One key ON/OFF lights; Timing ON/OFF; App Remote Control
- Operating mode: touch-sensitive
- Power specification: 110~230V AC±10%, 50/60Hz
- Max Current: 1 outputs - Max 5A\*1;  
2 outputs - Max 5A\*2;  
3 outputs - Max 5A\*3.
- Product Type: 1 / 2 / 3 way
- Operate temper: 0°C-40°C(32°F-104°F)
- Operating humidity: 20%-85% non-condensing
- Radio frequency: 868.40MHz EU; 908.40MHz US
- Wireless distance: 70m outdoor; 50m indoor
- Product size: EU 86mm\*86mm\*34mm  
US 120mm\*74mm\*37mm



NAS-SC01Z/02Z

## Z-Wave Device

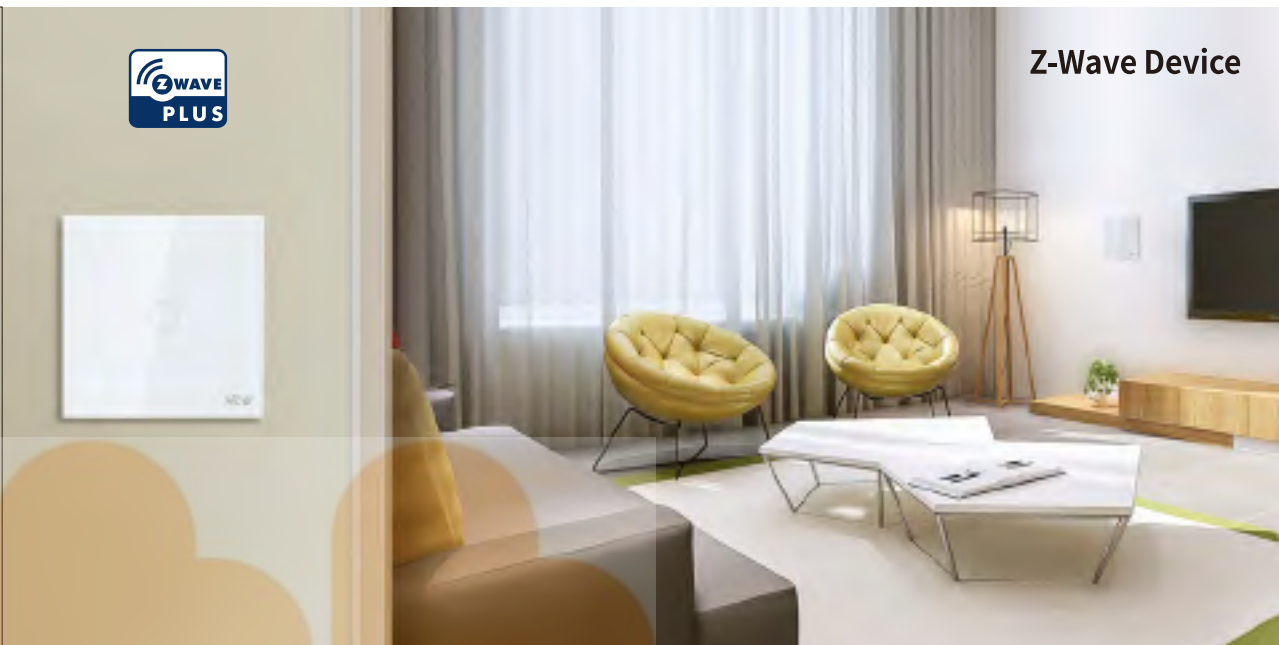

### 2 Way Light Switch

- One key ON/OFF light; Timing ON/OFF;
- App Remote Control
- Power: 80~250VAC, 50/60Hz
- Current Output: 10A
- Power consumption: 1.2W
- Power Output: 2000W
- Operating mode: touch-sensitive
- Working temperature: 0-70°C
- Wireless protocol: Z-Wave
- Wireless frequency: 868.40MHz EU; 908.40MHz US
- Wireless range: 70m outdoor; 50m indoor
- Product size: 86mm\*86mm\*34mm



NAS-SC01Z A/B

## Z-Wave Device



## Z-Wave Device



### ➔ Curtain Switch

- Timing on/off curtain or rolling doors
- Power: 80~250V AC, 50/60Hz
- Current Output: 10A
- Power consumption: 1.2W
- Operating mode: touch-sensitive
- Working temperature: 0-70°C
- Wireless protocol: Z-Wave
- Wireless frequency: 868.40MHz EU; 908.40MHz US
- Wireless range: 70m outdoor; 50m indoor
- Product size: 86mm\*86mm\*34mm



NAS-SC03Z

### ➔ Repeater

- Increase the distance to 80-100M between Z-Wave devices
- Temperature and humidity detection
- Power: 85~240V AC, 50/60Hz
- Power consumption: 0.8W
- Temperature detection range: -20~80°C
- Wireless protocol: Z-Wave
- Wireless frequency: 868.40MHz EU; 908.40MHz US
- Wireless range: Outdoor 100 meters, indoor 80 meters
- Product size: 48mm\*42mm\*44mm



NAS-RP01Z



## Z-Wave Device



## Z-Wave Device



### Power Plug(EU/US)

- ON/OFF control
- Measuring voltage, current, instant power, accumulated power
- Compatible with 500 series and 700 series
- Input voltage: 85V~265V AC,50/60HZ
- Max current: 13A
- Operation temperature: 0-40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size:  
US 43mm\*43mm\*45mm  
EU 43mm\*43mm\*65mm



NAS-WR01ZE/NAS-WR02ZU



### Power Plug(UK/AU)

- Remote control appliance power ON/OFF on mobile-phone App
- Measuring voltage, current, instant power, accumulated power
- Compatible with 500 series and 700 series
- Input voltage:85~265V AC 50/60Hz
- Maximum current:13A
- Operating temperature:0-40°C
- Radio Frequency:868.4MHz UK; 921.4MHz AU
- Range:70m outdoor; 50m indoor
- Product size:  
UK 58mm\*58mm\*55mm  
AU 54mm\*54mm\*52mm



NAS-WR03ZE/NAS-WR04ZU





## Z-Wave Device



## Z-Wave Device



### Water Sensor

- Flood detection
- Compatible with 500 series and 700 series
- Battery: CR2×1
- Standby current: 2uA
- Battery Life: 2 years
- Operation Temperature: 0-40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 68mm\*68mm\*34mm



NAS-WS01Z / NAS-WS02Z



### Siren Alarm

- Trigger alarm, make sound and light
- Compatible with 300 series and 500 series
- 10 sound can be select
- Battery: CR123A x 2
- USB power supply: 5V, 1A (NAS-AB02Z only)
- Stand-by time: 1 year
- Sound intensity: 100dB
- Operation temperature: 0~40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 68mm\*68mm\*33mm




NAS-AB01Z / NAS-AB02Z



## Z-Wave Device



Temperature Sensing

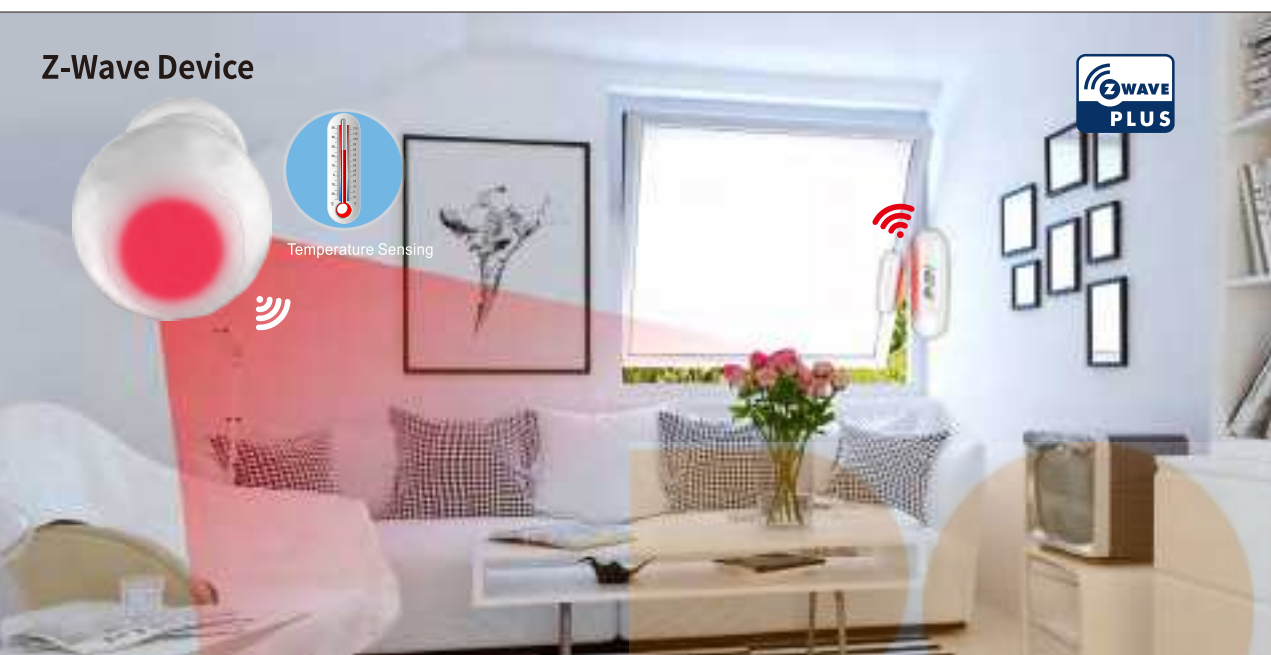

### ➔ Motion Sensor(PIR)

#### • Motion detection

- Compatible with 500 series and 700 series
- Power supply: CR123A×1
- Standby current: 16uABattery life:1 years
- Detection range: 7 meters
- Viewing angle: 110 degree
- Operation temper: 0-40°C
- Radio Frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 45mm\*45mm\*48mm



NAS-PD01Z / NAS-PD02Z

we love smart

## Z-Wave Device



### ➔ Motion Sensor

- Motion detection;Push notification to mobile phone
- With temperature and humidity sensor
- Anti-demolition function,push notification when device is removed
- Compatible with 500 series and 700 series
- Battery: CR123A x 2-3V
- USB Power supply: 5V/1A
- Standby current: 39.7uA
- Sensitive angle: 110°
- Sensitive distance:12m
- Radio frequency: 868.40MHz EU; 908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size: 68mm\*56mm\*56mm



NAS-PD07Z



## Z-Wave Device



### Door Sensor

- Detect open/close status of the door/window
- Compatible with 500 series and 700 series
- Standby current: 2uA
- Battery life: 2 years
- Operation temperature: 0-40°C
- Radio Frequency: 868.40MHz EU;  
908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size:  
Main body: 71mm\*21mm\*22mm  
Deputy body: 40mm\*11mm\*11mm



NAS-DS01Z

### Door Sensor

- Detect open/close status of the door/window
- Anti-demolition function and push notification
- Compatible with 500 series and 700 series
- Backup battery: CR123 × 1
- USB Power supply: 5V/1A
- Standby Current: 8uA
- Work Current: Up to 15mA
- Operation Temperature: 0°C~70°C
- Radio frequency:868.40MHz EU;  
908.40MHz US
- Range: 70m outdoor; 50m indoor
- Product size:  
Main body: 82mm\*27mm\*23mm  
Deputy body: 50mm\*13mm\*16mm



NAS-DS07Z

## TUYA WIRELESS IPC

### NIP-23AI

INDOOR  
720P



- Mega Pixels CMOS Sensor
- Motion detection, alarm push notification
- TUYA Smart Server
- Support for cloud platform, horizontal rotation 330 °, vertical rotation 120 °
- Image Frame Rate: 25fps
- Night vision:8 IR LED, 5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card

### NIP-55AI

INDOOR  
720P



- Mega Pixels CMOS Sensor
- Motion detection, alarm push notification
- TUYA Smart Server
- Image Frame Rate: 25fps
- Night vision:8 IR LED,5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card

### NIP-56AI

OUTDOOR  
720P



- Mega Pixels CMOS Sensor
- Motion detection, alarm push notification
- TUYA Smart Server
- Image Frame Rate: 25fps
- Night vision:20 IR LED,10-15m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card



# TUYA WIRELESS IPC

## NIP-63ND

INDOOR  
1080P



- 2 Mega Pixels CMOS Sensor
- Motion detection, alarm push notification.
- TUYA Smart Server;
- Support for cloud platform, horizontal rotation 330 °, vertical rotation 105 °
- Image Frame Rate: 25fps.
- Night vision:8 IR LED,5-10m
- Support IEEE 802.11/b/g/n
- Support up to 128G TF card

## NIP-33RQ

OUTDOOR  
1080P



- 2 Mega Pixels CMOS Sensor
- Motion detection, alarm push notification.
- TUYA Smart Server;
- Support for cloud platform, horizontal rotation 355 °, vertical rotation 155 °
- Image Frame Rate: 25fps.
- Night vision:6 IR LED,5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card

## NIP-68RQ

INDOOR  
1080P



- 2 Mega Pixels CMOS Sensor
- Motion detection, alarm push notification.
- TUYA Smart Server;
- Support for cloud platform, horizontal rotation 355 °, vertical rotation 155 °
- Image Frame Rate: 25fps
- Night vision:2 IR LED,5-10m
- Support IEEE 802.11/b/g/n
- Support up to 64G TF card

## WiFi Smart Devices



## Z-Wave Sensor



## ZigBee Sensors

