









Bao'an District, Shenzhen





Company profile	P3-4
2/ Product classification	P5-6
3/ Indoor products	P7-20
4/ Outdoor products	P21-28
5/ Function introduction	····· P29-30



About Gledopto

GLEDOPTO CO.,LTD devotes itself to developing new products with new idea or new technology.

We always follow the tenet of "good faith cooperation to create a win-win situation", and insist on "good quality is our responsibility to customers, good quality is the only sustainable condition" to provide customers with first-class products, first-class technical support and first-class service.

Gledopto located in Shenzhen since 2010. Innovation is the aim of our work. We make our traditional LED products reborn with our new RF remote control technology, ZIGBEE technology and rich LED experience.

Certificates



















Product Classification

Indoor products

LED Controller

Patent No.: 2017306320366

LED Bulb



RGB+CCT LED Controller



RGBW LED Controller



WW/CW LED Controller



LED Dimmer

Spotlight





Color LED Bulb

4W Dual White And Color LED Bulb





5W Dual White And Color LED PAR16



5W Dual White And Color LED GU10

Downlight



6W Dual White And Color LED Downlight



Color LED Bulb

9W Dual White And Color LED Downlight



12W Dual White And Color LED Downlight

Outdoor products

Flood light

Dual White And Color



10W Flood light



30W Flood light



60W Flood light

Garden lamp Dual White And Color





Compatible gateways for Zigbee light link(ZLL)

For gateways such as philips hue, Homee, osram lightify, ikea tradfri or amazon echo plus.





LEDController

RGB+CCT

RGBW

WW/CW

LED Dimmer



Fireproof material
Press type Design
Compatible for Zigbee

Controller



Parameter

Input Voltage	DC12-24 V
Size	23.5x48x89mm
Ouput Current/Channel	6 A max
Protection rate	IP20
Total Output Current	15 A max
Operating Temperature	-20°C~60°C
Common A	node
Constant Vo	oltage

Structure




Compatible gateways for Zigbee light link(ZLL)

ZIGBEE transmission technology, MESH, multi signal at the same time to transmit, receive, anti interference ability.

16 million colors changing



Easy to install

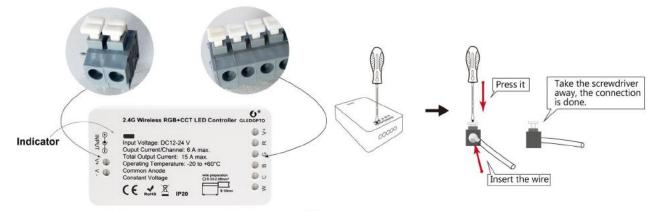

.

4W/6W/12W LED BULB

—Dual White And Color—



Brightness adjustment Smart phone control


4W Candle Light Bulb



Parameter

- Size: Ф37.5*103.5mm(E12) / Ф37.5*110mm(E14)
- Power Rating: 4W
- Input voltage: AC100~240V • Color temperature: 2700K~6500K
- Luminous Flux: 200LM Working Temp: -20°C~60°C
- Beam angle: 120° • Lifetime: 50000hours
- CRI: >80
- N.W.: 0.04kg
- G.W.:0.06kg
- Huosing: Plastic + Aluminum
- LED Quantity: 3.0W RGB SMD5050 1pcs
 - 1.0W SMD 3030 6pcs
- Function: functional white light, all shades of white, from warm to cold white color, dimmable via smart device only





Auto-transfer

Features

Gateways/hubs Gledopto zigbee products Directly work with: HUE,Amazon echo plus, smartthings,Osram lightify,Ikea TRÂDFRI ,Homee etc,Via Hue gateway, can work with google home, all other alexa devices

Apps work with Hue gateway: Hue,hueparty,hue Disco,iConnectHue,Hue Widget,Light DJ,etc

Work with Home assistant:

https://www.reddit.com/r/Gledopto/comments/ad9mbh/how_to_use_home_assistantha_to_control_gledopto/

https://www.reddit.com/r/Gledopto/comments/amp3v9/i_wrote_a_little_guide_on_getting_the_gledopto/

Sync effect with screenbloom:

Sync your lights with movies ,music, and games, Enjoy the lighting effect which synchronizes with the plot of the picture immediately, and experience the more delicate atmosphere lighting effect.

please follow this website: http://www.screenbloom.com/ Sync Show Demo: https://youtu.be/zZjtJMy_774

Q&A or more info, please go to: https://www.reddit.com/r/Gledopto/

Structure



High-quality LED chips, Low fever, high brightness, durable use life of 50 thousand hours



Adopt high - grade PMMA Lens. transmittance 93%. The light distribution is more uniform. no dark spots, effectively reduce the adverse glare damage to the eyes.



Fireproof material, high temperature resistance, durable



ZIGBEE transmission technology, multi signal at the same time to transmit, receive



Use of high quality power supply, long life, can be used for a long time, more



E12/E14 wide voltage design (100-240V), wide application, **6W LED Bulb**



Parameter

• Size: Φ57*102mm • Power Rating: 6W

• Input voltage: AC100~240V • Color temperature: 2700~6500K • Luminous Flux: 500~550LM • Working Temp: -20°C~60°C

• Beam angle: 180° • Lifetime: 50000hours • CRI: >80


• N.W.: 0.07kg • G.W.: 0.1kg

• Huosing: Plastic + Aluminum

• LED Quantity: 1.5W RGB SMD5050 4pcs 1.0W SMD 3030 10pcs

• Function: functional white light, all shades of white, from warm to cold white color, dimmable via smart device only

Auto-transfer



Application











ENERGY IJA енергия · ενεργεια 6.00KWh/1000h

16million color changing 16 million colors for you to choose and make

Brightness adjustment

Choose the right brightness according to

your life colorful.

Color temperature regulation

Warm white to cool white change randomly from

 Smart phone APP control You can control the lights of all the rooms by mobile phone APP, which will make your life more convenient.

Enjoy your smart lighting life



Party



Work





Study Sleep

Parameter

12W LED Bulb

• Size: Φ70*147mm Power Rating: 12W

 Input voltage: AC100~240V • Color temperature: 2700~6500K • Luminous Flux: 900~1100LM • Working Temp: -20°C~60°C

• Beam angle: 220° • Lifetime: 50000hours

• CRI: >80 • N.W.: 0.26kg • G.W.: 0.3kg • Huosing: Aluminum


• LED Quantity: 1.5W RGB SMD5050 4pcs

1.0W SMD 3030 12pcs

• Function: functional white light, all shades of white, from warm to cold white color, dimmable

via smart device only

Structure

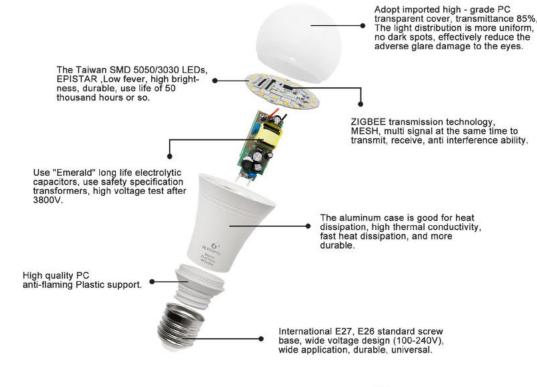

Features

70mm

Soft start, high safety Power off memory

Easy Installation


Compatible gateways for Zigbee light link(ZLL)

16 million colors changing

Two years warranty, CE, RoHS

Smart phone app control





TIGES GU10 Spotlight Dual White And Color



SMART LIGHTING HAPPY LIFE

5W GU10



Beam angle: 30°



Beam angle: 120°

Parameter

Size: Φ49.5*58mmPower Rating: 5W

Input voltage: AC100~240V
Color temperature: 2700~6500K
Luminous Flux: 300~350LM
Working Temp: -20°C~60°C
Beam angle: 30°/120°


Lifetime: 50000hours
CRI: >80
N.W.: 0.09kg
G.W.: 0.1kg

Huosing: Aluminum

• LED Quantity: 1.5W RGB SMD5050 2pcs 1.0W SMD 3030 8pcs


Function: functional white light,all shades of white,from warm to cold white color,dimmable

via smart device only





Auto-transfer

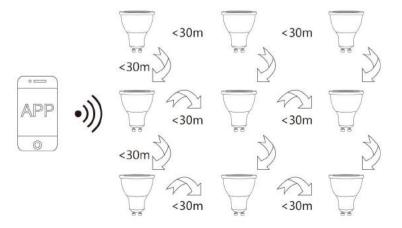

Structure



GU10 wide voltage design (100-240V), wide application, durable, universal.



Adopt high - grade PMMA Lens, transmittance 93%,reduce the adverse glare damage to the eyes.



Aluminum housing with better heat sink effect, surface treated with the electrophoresis paint, more excellent performance.



ZIGBEE transmission technology, multi signal at the same time to transmit.



5 W PAR16 Spotlight
Dual White And Color



SMART LIGHTING HAPPY LIFE

5W PAR16



Parameter

Size: Φ49.5*61mmPower Rating: 5W

Input voltage: AC100~240V
Color temperature: 2700~6500K
Luminous Flux: 300~350LM
Working Temp: -20°C~60°C

Beam angle: 30°Lifetime: 50000hours

CRI: >80N.W.: 0.09kgG.W.: 0.1kg

• Huosing: Aluminum

• LED Quantity: 1.5W RGB SMD5050 2pcs 1.0W SMD 3030 8pcs

 Function: functional white light,all shades of white,from warm to cold white color,dimmable via smart device only

16 million colors changing


Features

Soft start, high safety Power off memory Easy Installation

Compatible gateways for Zigbee light link(ZLL)

16 million colors changing
Two years warranty,CE,RoHS

Auto-transfer

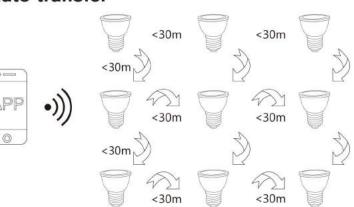



Structure



PAR16
wide voltage design
(100-240V), wide application,
durable, universal.




Aluminum housing with better heat sink effect, surface treated with the electrophoresis paint, more excellent performance.



Adopt high - grade PMMA Lens, transmittance 93%,reduce the adverse glare damage to the eyes.




ZIGBEE transmission technology, multi signal at the same time to transmit.



ZIGBEE

6W/9W/12W LED DOWNLIGHT

Dual White And Color

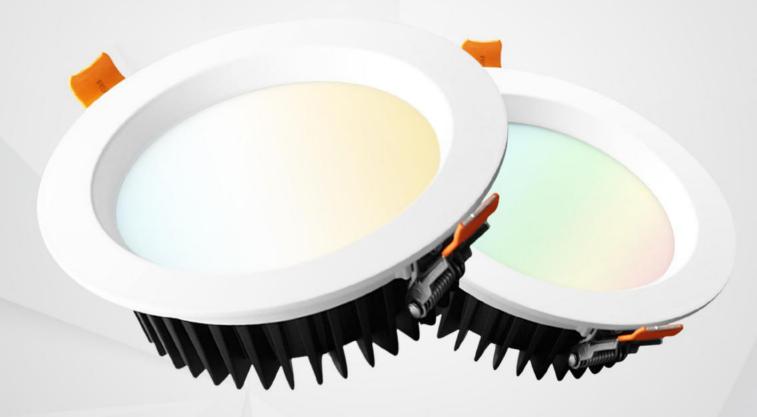

16 million color changing Brightness adjustment Smart phone control


6W/9W/12W LED Downlight



Parameter

Power	6W	9W	12W
Hole Size	100~110mm	100~110mm	130~140mm
Luminous Flux	500~550LM	800~850LM	1000~1050LM
CRI	>80		
PF	>0.5		
Lifespan	50000 hours		
Input Voltage	AC 100~240V		
Color temperature	2700~6500K		
Light Efficiency	88LM/W		
Material	Aluminum+PC Cover		

Auto-transfer

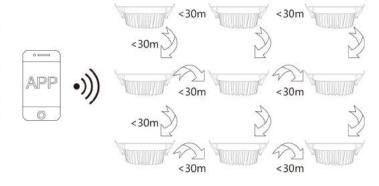



Structure





Install

- 1.Please open the hole on the ceiling according to the correct size of Diagram 1.
- 2.Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling Diagram 2 and 3.
- 3. Connect the driver properly according to the wire connection Diagram 4.













10W/30W/60W LED Flood light










60W Flood light

10W Flood light


Parameter

Power	10W	30W	60W
Size	165x127x33mm	226x186x41mm	314x244x51mm
Luminous Flux	650~700LM	2000~2500LM	5000~5500LM
Net weight	440g	1060g	1960g
Input Voltage	AC 100~240V		
Color temperature	2700~6500K		
Working temp	-20~60°C		
Lifespan	50000 hours		
IP Rate	IP65		
Material	Aluminum, toughened glass		

Auto-transfer



Structure



Protection rate: IP65

By using whatr-proof connector and silliconrubber sealing, the protection rate can achieve IP65, meeting the requirement forharsh, tough environment.



Pure aluminium reflector

The reflector is mede of pure aluminium(99.8%) which anti-oxidation and unfading in colour, ensuring the reflection.



The entire housing coated by electrophoretic paint

Processed by electrophoretic paint, measured by 200hours salt test, the entire housing has excellent corrosion resistance.



Tempered glass panel

4 mm tempered glass panel safely protect the lighting source, and the transparent rate is up to 93%.



Wide angel for adjustment

With multiple adjustment points the adjustment angel can be up to 270°.



Stainless steel parts

Endurancing the corrosion of air, chemiccal acid, alkaline, salt and other materials, can be used in all kinds of harsh conditions for long term.



TIGBEE 9W/12W (Garden lamp) Dual White And Color)



16 million color changing Brightness adjustment Smart phone control

— 25 —

9W Garden lamp



Parameter

• Power: 9W

White LED Power: 9W
 RGB LED Power: 6W

Luminous flux: 800~850LM
Input voltage: AC100-240V
Kelvin: 2700K~6500K
Working temp: -20~60°C

IP Rate: IP65CRI: Ra>80(whtie)

• Line length: 3m long cable

Life span: 50,000h
Gross weight: 1250g
Size: 400x185x105mm

• Material: Aluminum+PMMA lens

Cover: TransparentBeam angle: 60°

Structure



Anticorrosion inserted pole High quality Aluminum, longer




Features

Soft start, high safety Power off memory Easy Installation

Compatible gateways for Zigbee light link(ZLL)

16 million colors changing
Two years warranty,CE,RoHS

Auto-transfer





12W Garden lamp



Parameter

• Power: 12W

White LED Power: 12W
RGB LED Power: 6W
Luminous flux: 850~950LM
Input voltage: AC100-240V
Kelvin: 2700K~6500K
Working temp: -20~60°C

IP Rate: IP65CRI: Ra>80(whtie)

• Line length: 3m long cable

Life span: 50,000h
Gross weight: 950g
Size: 137x300x51mm

• Material: Aluminum+PMMA lens

• Beam angle: 25°

Works with amazon alexa



Structure



High Efficient LED Chips

The Taiwan EPISTAR 3030 chip distribution 15,Low fever, high brightness, durable, use life of 50 thousand hours or so.



Constructure&Parts

High quality PMMA Lens Die-cast aluminium housing excellent corrosion resistance stainless steel screws and parts.



Angle Adjust

It's easy for customers to change the angle



High Quality Plug&Cable

US/UK/AU/EU standard plug, rubber cable x3M,H05RN-F/SJOW



Anticorrosion Stake

High quality Aluminum, longer and stronger anticorrosion













Color temperature regulation

Adjust warm white to cool white randomly, adjust the color temperature from 2700-6500K, make the light you want.



Sync your lights with movies, music and games

Enjoy the lighting effect which synchronizes with the plot of the picture immediately, and experience the more delicate atmosphere lighting effect.

Control your colorful life

16 million colors and saturation change, make the life full of beauty



• Brightness adjustable

Adjust the brightness according to your different using requirements, give the light you want.





Smart phone APP control

You can control the lights of all the rooms by mobile phone APP, which will make your life more convenient.