

## Aqara










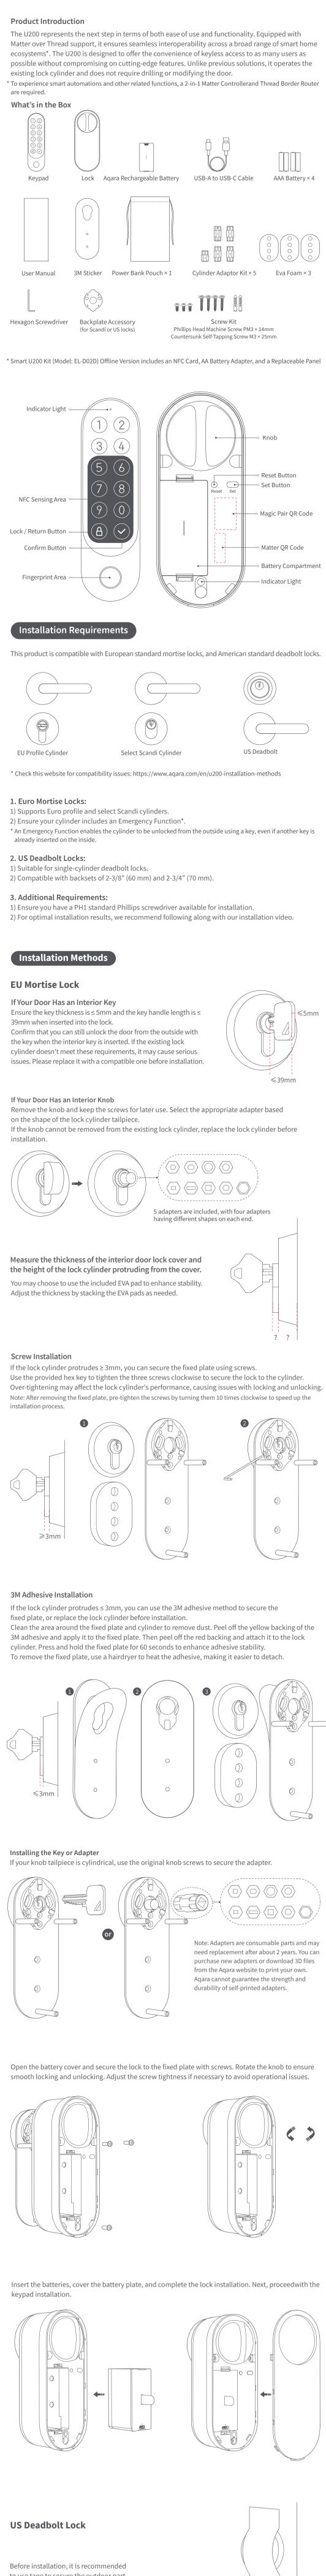


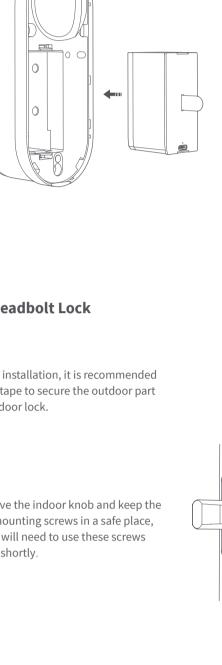

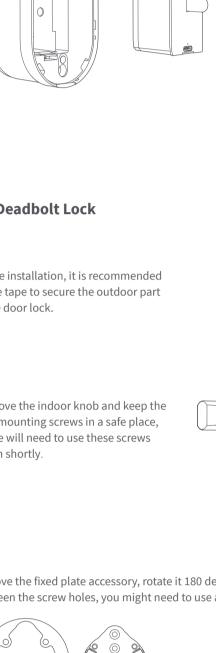


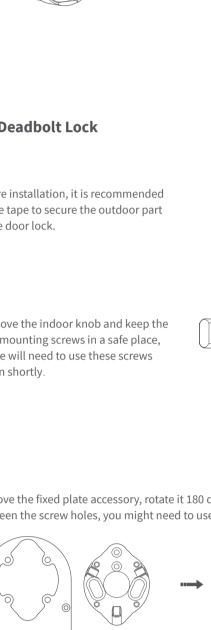


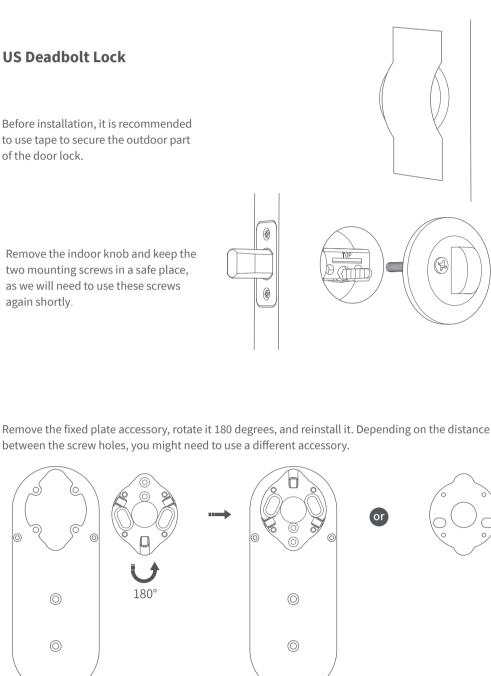

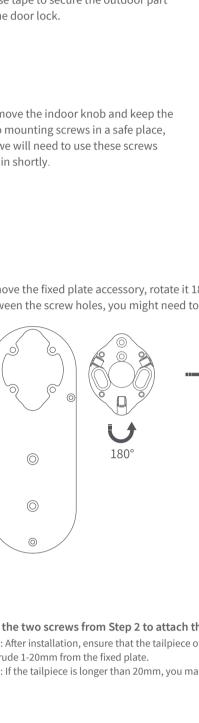





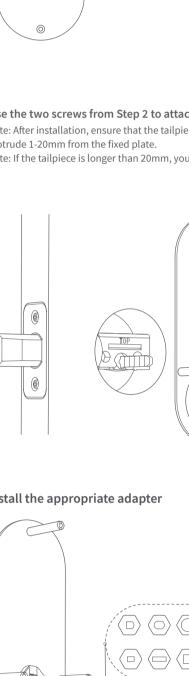


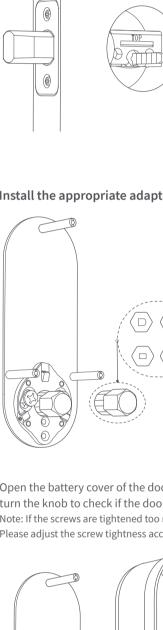




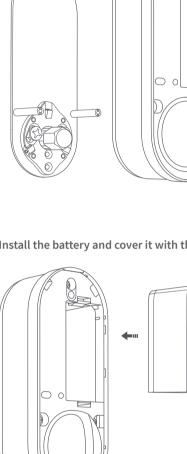

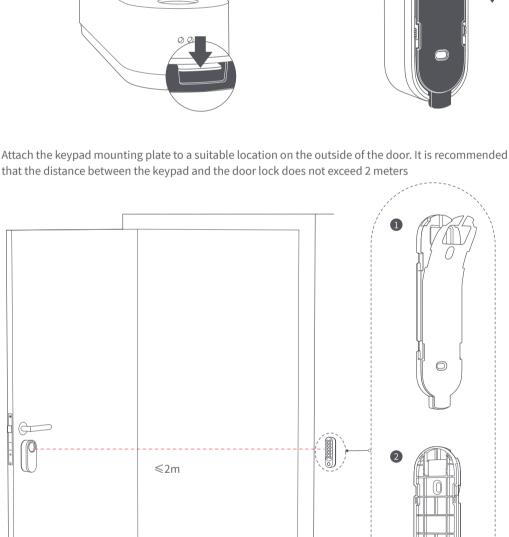

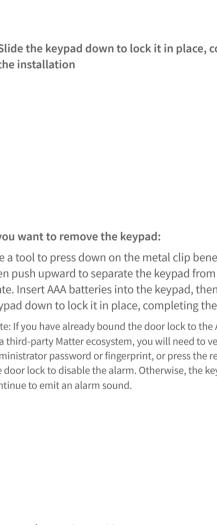



**Enter Paring Mode** 

Door Lock Reset

Door Lock Calibration

Set Button

Reset Button

Quiet Lock Mode Verify Password Quiet Unlock Confirm Button Quiet Lock Mode **Local Settings** 

1 2 3 4	ocal Settings through the Keypad contains: ) Add user: Add users and register fingerprints and passwords. ) Remove users: Remove users and their credentials. ) Volume & Language: Customize volume and language settings. ) Matter reset: Reset the Matter ecosystem already bound. ) Door lock calibration: Calibrate the door lock.
<ol> <li>2.</li> <li>3.</li> </ol>	If you are an Aqara Home user and have set up an admin user, press and hold the confirm button on the keypad for 3 seconds, then verify the admin credentials to access the local settings.  If you are using another Matter ecosystem and have set up the first user, press and hold the confirm button on the keypad for 3 seconds, then press the setup button on the indoor lock to access the local settings.  On the local settings, follow the voice prompts and press the number key (1) on the keypad to add a new user. Set a password and fingerprint for the new user. Press the Lock button (Return button) to exit the settings page after completing the process.  If the lock is bound to both Aqara and another Matter ecosystem, you must verify the Aqara admin credentials on the keypad to access the local settings.

Quiet Lock and Unlock Mode

The U200 features Quiet unlock and lock functions locally:

verification. If successful, the lock will unlock Quietly.

1. Outdoor Quiet Unlock: Press the confirm button on the keypad, then complete the unlock

2. Outdoor Quiet Lock: Press the confirm button on the keypad, then press the lock button. The lock

To use the following features, add the lock in the Aqara Home app and enable the auxiliary rotation

**Connecting to Aqara Home** Download the Aqara Home app from the Apple App Store, Google Play, Xiaomi GetApps, Huawei App Gallery, or by scanning the provided QR code. Power on the device, bring your phone near it, open the app, tap the "+" icon, select "Smart Lock U200," and follow the instructions. You can scan the following code for download Agara Home app or check the Installation Video directly. **Aqara Home** Note: Enjoy more exclusive features with the Aqara Home app without needing a hub, within Bluetooth range. 1. This product supports Aqara Magic Pair technology. After powering on the device, press the setup button to enter pairing mode. The Aqara Home app will automatically detect the device. Select it and follow the app instructions to complete setup. 2. Keep your phone close to the device during pairing. Ensure your phone is connected to the internet and Bluetooth is enabled. 3. Follow the app instructions to scan the QR code on the product or enter the 8-digit pairing code to

confirm the addition of the device. **Connecting to other Matter Ecosystems** 1. Ensure you have a 2-in-1 Matter Controller and Thread Border Router for third-party ecosystems for the binding. Power on the door lock, press the Set button to enter pairing mode, then use the third-party app to scan the Matter QR code or enter the setup code from the Lock or user manual. 2. To add the device to another ecosystem after binding it to Matter, use the Matter app to share the device with other platforms. 3. If you want to bind the device to another ecosystem and remove the current one, first remove the device from the app, then reset the door lock or go to the local settings page to reset the Matter ecosystem. The door lock will revert to its initial pairing mode. Refer to the Local Settings section of the manual for reset instructions. Note: In the early stages of the Matter ecosystem, different platforms support varying features. For example, some platforms do not support adding door lock passwords. For a better user experience, we recommend adding the device in the Agara Home app. Adding Apple Home Key (for iOS Users) After setting up the Aqara Smart Door Lock U200 in the Apple Home app, add a home key in the Wallet app to easily and securely access your home with your iPhone: 1. To control this Matter-certified accessory, use the latest iOS or iPadOS. You'll need an Apple home hub, such as HomePod mini, HomePod (2nd gen), or Apple TV 4K (3rd gen, Wi-Fi + Ethernet). Other HomePod or Apple TV models require a compatible Thread border router. For the home key feature, you need an iPhone XS or newer with iOS 17.1 or higher, and an Apple Watch Series 4 or newer with watchOS 10.1 or higher. 2. After connecting to Apple Home, the "Wallet" app will automatically generate the Apple home keys. 3. Apple, Apple Watch, HomePod, HomePod mini, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. The "Works with Apple Home" badge is a trademark of Apple Inc. 4. Using the "Works with Apple" badge means the accessory is designed and certified to meet Apple's performance standards. Apple is not responsible for the device's operation or compliance with safety and regulatory standards. or Apple Watch. After installation, users can calibrate the door lock using the Aqara Home app or directly on the lock.

Operations

Single press the Set Button

Long press (3s) the Set Button

Single press the Confirm Button followed by password or

Single press the Confirm Button followed by single press Lock Button

 Confirm Button Lock / Return Button

Indicator Light

Aqara Home Users: Long press (3s) Confirm Button until you hear

Matter Users: Long press (3s) the Confirm Button and press the

fingerprint unlocking

the voice prompt

Set Button on the Lock

Set Button

Slide the keypad down to lock it in place, completing the installation

Open the battery cover of the door lock and use screws to attach the door lock to the fixed plate. Then, turn the knob to check if the door lock can be smoothly locked and unlocked. Note: If the screws are tightened too much, it may cause difficulty in locking and unlocking.

0 0

0

0


0


1-20mm


Note: Adapters are consumable parts and may need replacement after about 2 years. You can purchase new adapters or download 3D files from the Aqara website


Agara cannot guarantee the strength and durability of self-printed adapters.


to print your own.

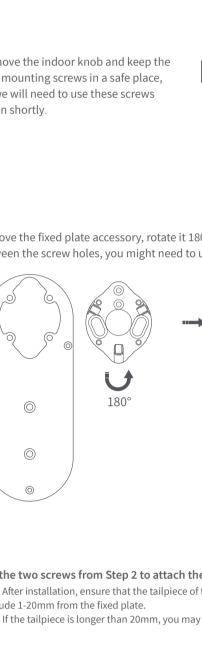


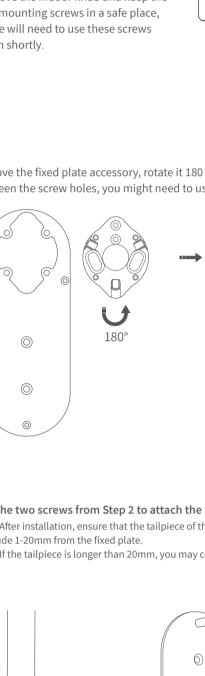


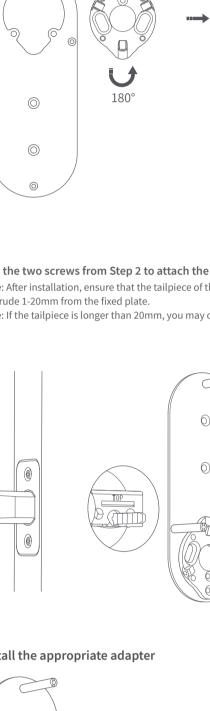


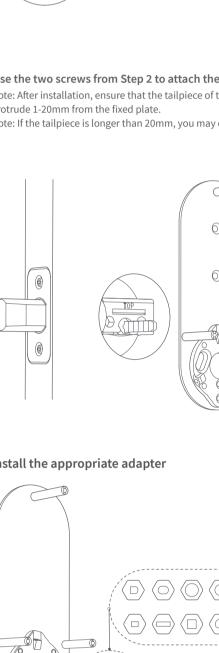


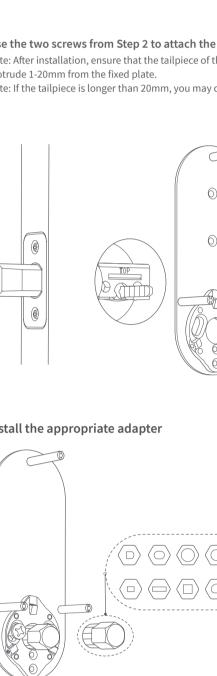


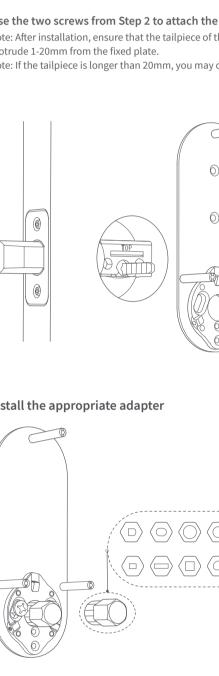


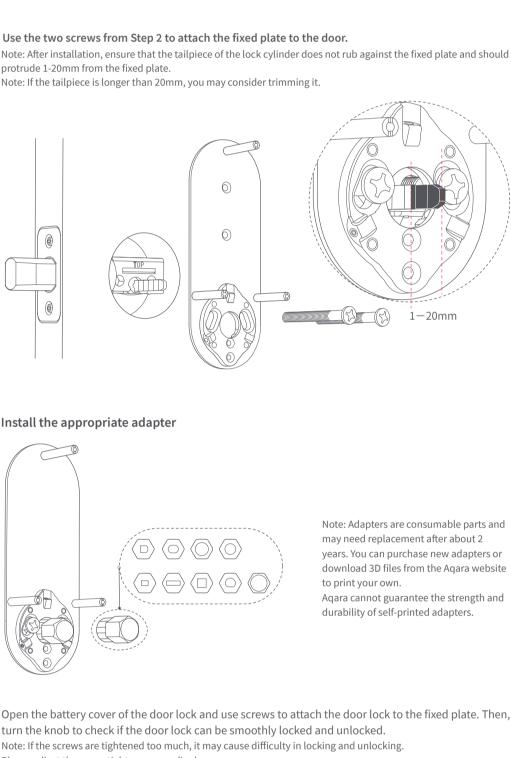


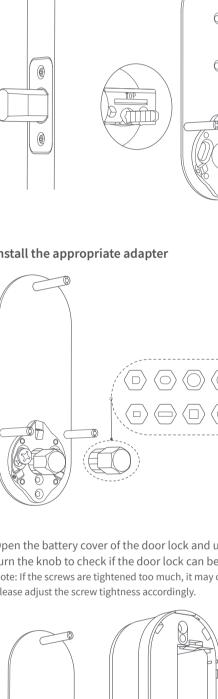

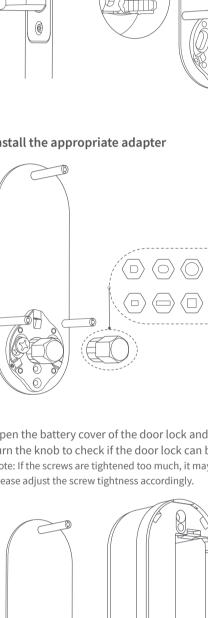


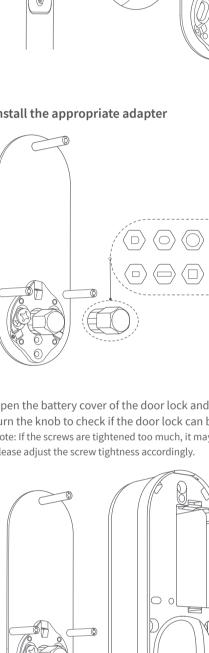

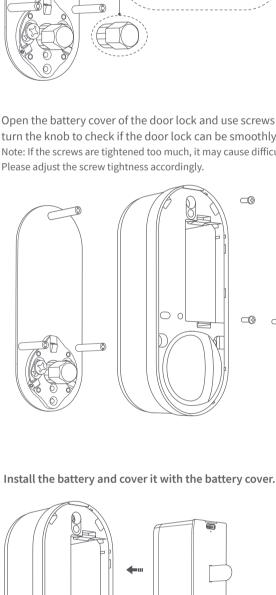

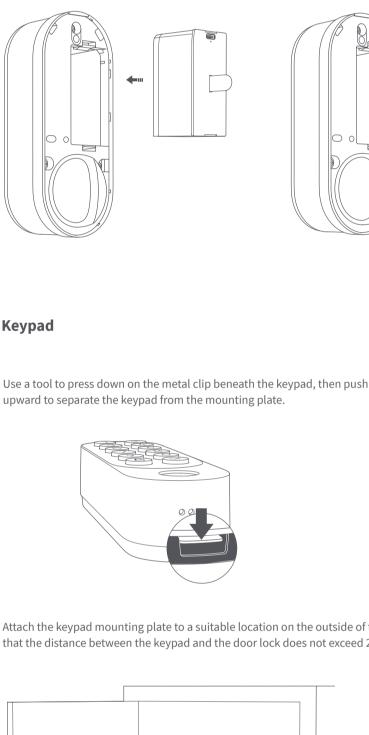



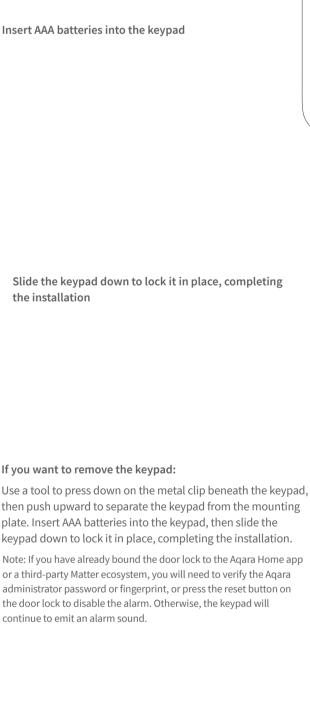

- **Lock Calibration** Here's how to calibrate on the lock: 1. Close the door and unlock it from the inside. Press and hold the Set button on the lock for 3 seconds to start calibration. 2. The lock will beep twice, then rotate to the unlock and lock positions. It will play a tune when Two beeps during calibration indicate failure. The lock won't function properly if calibration is incomplete. If calibration fails or is inaccurate, check if the mounting screws are too loose or tight and adjust them before If calibration issues persist, use the manual calibration feature in the Agara Home app
- Keypad **Operations Buttons Features** Lock Lock Single press the Lock Button **Button** Long press (3s) Lock Button Single press the Confirm Button after entering the password
- **Battery Indicator** Red Low battery or charging Green Battery fully charged
- feature in the settings: 1. Indoor Quiet Unlock: Slowly turn the door lock knob in the unlock direction for a Quiet unlock. 2. Indoor Quiet Lock: Slowly turn the door lock knob in the lock direction for a Quiet lock. Note: Customize Quiet functions using the Agara Home app. Auto-Lock To use the auto lock function, add the lock in the Aqara Home app and enable the auto lock feature in the settings. Please note: 1. You may need to calibrate the lock's open and close angles using the Aqara Home app before enabling this feature. leaving. Resetting the Lock and Keypad

will lock Quietly.

seconds to enter reset mode. Verify the admin password or fingerprint on the keypad. If correct, the lock will reset to factory settings and erase all data. 2. If bound only to Matter ecosystem: Press and hold the lock button and confirm button on the keypad for 5 seconds to enter reset mode. Then press and hold the reset button on the lock for 3 **Exclusive Features** 

**Reset Smart Lock U200** 1. Agara Home Users

**Power Setup** 1. Door Lock

seconds. The lock will reset to factory settings and erase all user data. We recommend using the Aqara Home app to access exclusive features and detailed settings such as Manual Calibration, Auto Lock, Auto-Turn Lock/Turn to Lock, Pull Spring Feature, and more. Note: Features like Away Mode, Night Latch Mode, Auto Unlock Mode, and others will be gradually rolled out via OTA updates around the end of H2 2024 through Aqara Home app.

1) Press and hold the Lock and Confirm buttons on the keypad simultaneously for 3 seconds to

The Smart Lock U200 supports charging while in use. Place the charger in the supplied pouch and hang it on the door handle to charge the lock. 2. Keypad You can use LR3 AAA batteries or have a professional electrician connect a 12V-24V 0.5A AC/DC power supply to your keypad.

clear all user data and restore factory settings.

- - - **Installation Video**
  - 1) Ensure your lock is only bound to one Matter ecosystem. 2) Initiate Reset Mode on the keypad by pressing the Lock and Confirm buttons for 5s simultaneously. 3) Press and hold the Reset button on the lock for 3s. Reset Button
- pad contains: ister fingerprints and passwords. s and their credentials. nize volume and language settings. er ecosystem already bound. ate the door lock. r and have set up an admin user, press and hold the confirm button on n verify the admin credentials to access the local settings.

- 2. After closing the door, the lock will attempt to lock automatically. Ensure the lock is secure before 3. After extended use, you may need to recalibrate the lock's open and close angles. You can reset the lock using either of these methods: 1. If bound to Aqara Home: Press and hold the lock button and confirm button on the keypad for 5
- enter Reset Mode. 2) After the prompt, verify with the admin password or fingerprint. If correct, the lock will clear all user data and restore factory settings. 2. Other Matter Ecosystem Users 1) Press and hold the Lock and Confirm buttons on the keypad simultaneously for 3 seconds to enter Reset Mode. 2) After the prompt, press and hold the Reset button on the lock for 3 seconds. The lock will

If you have any other questions about this product, you can find more product information on the

following website: https://www.aqara.com/en/u200-installation-methods

Address: Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District,

Online Customer Service: www.aqara.com/en/support.html

Manufacturer: Lumi United Technology Co., Ltd.

Shenzhen, China

Email: support@aqara.com