

M3 Pro

Professional Outdoor RFID Access Control Terminal



IP65



Access Control
Equipment



13.56Mhz and 125Khz
dual Frenqucy



IK10



Bluetooth



Wiegand Out


M3 Pro is a metal casing, IP65 water-proof design compact access control device, suitable for outdoor applications. It supports 13.56MHz mifare card and 125KHZ EM card dual frequency module. The touch backlit keypad, support TCP/IP and RS485 communication convenient for customers to use. The M3 Pro has both built-in relay for direct lock and standard wiegand output, which can be work as standalone access controller and RFID reader.



IP65 Professional Water Proof Design



Bluetooth Magic Shake Open

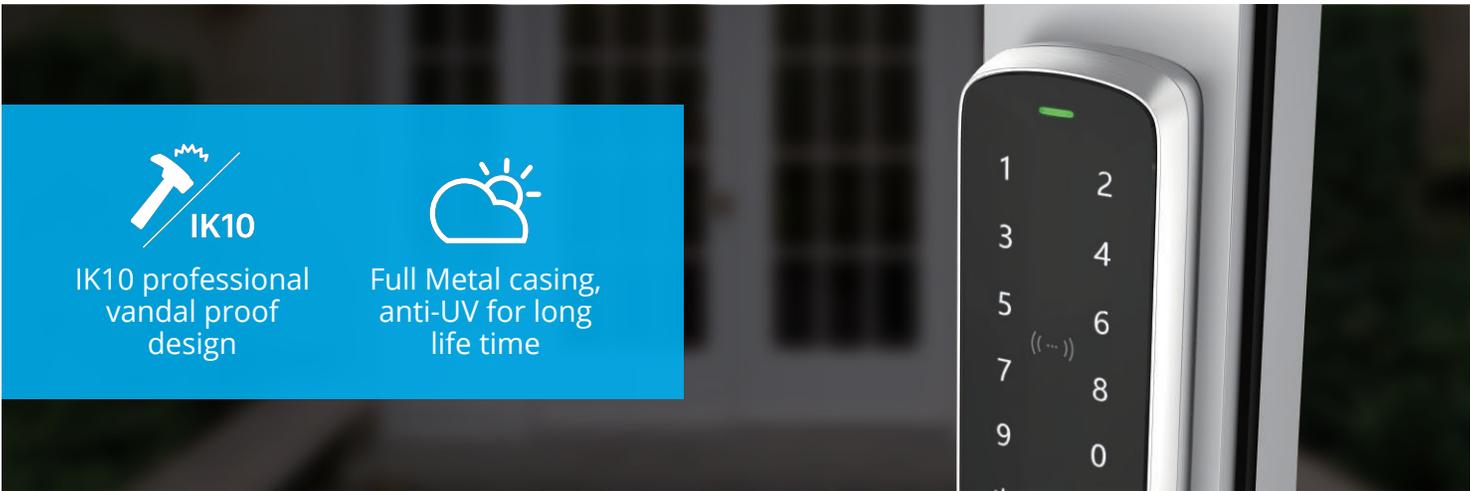

IK10 professional vandal proof design

Full Metal casing, anti-UV for long life time



EM, Mifare, NFC Card compatible



Product Specifications

Category	Function	M3 Pro
	Image	
	Name	Outdoor RFID Standalone Access Control
Capacity	User	10,000
	Card	10,000
	Record	200,000
I/O	Interfaces	TCP/IP, RS485, Mini USB, Wiegand Out
Features	Identification Mode	Password, RFID Card, Bluetooth (optional)
	RFID Card Type	Dual Frequency for EM and Mifare
	Keypad	Touch Keypad
	LED Indicator	Support
	Working Temperature	-30°C~60°C
	Humidity	20% to 90%
	Power Input	DC 12V 1A
	IK Grade	IK10
	IP Grade	IP65

M3 Pro

Professional Outdoor RFID Access Control Terminal

Controller and Reader all in one

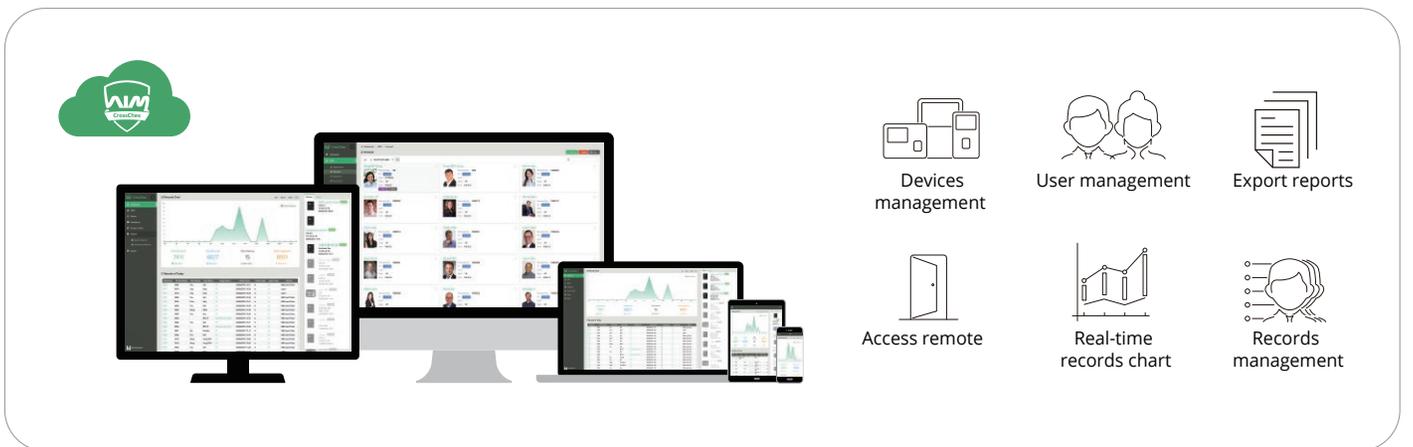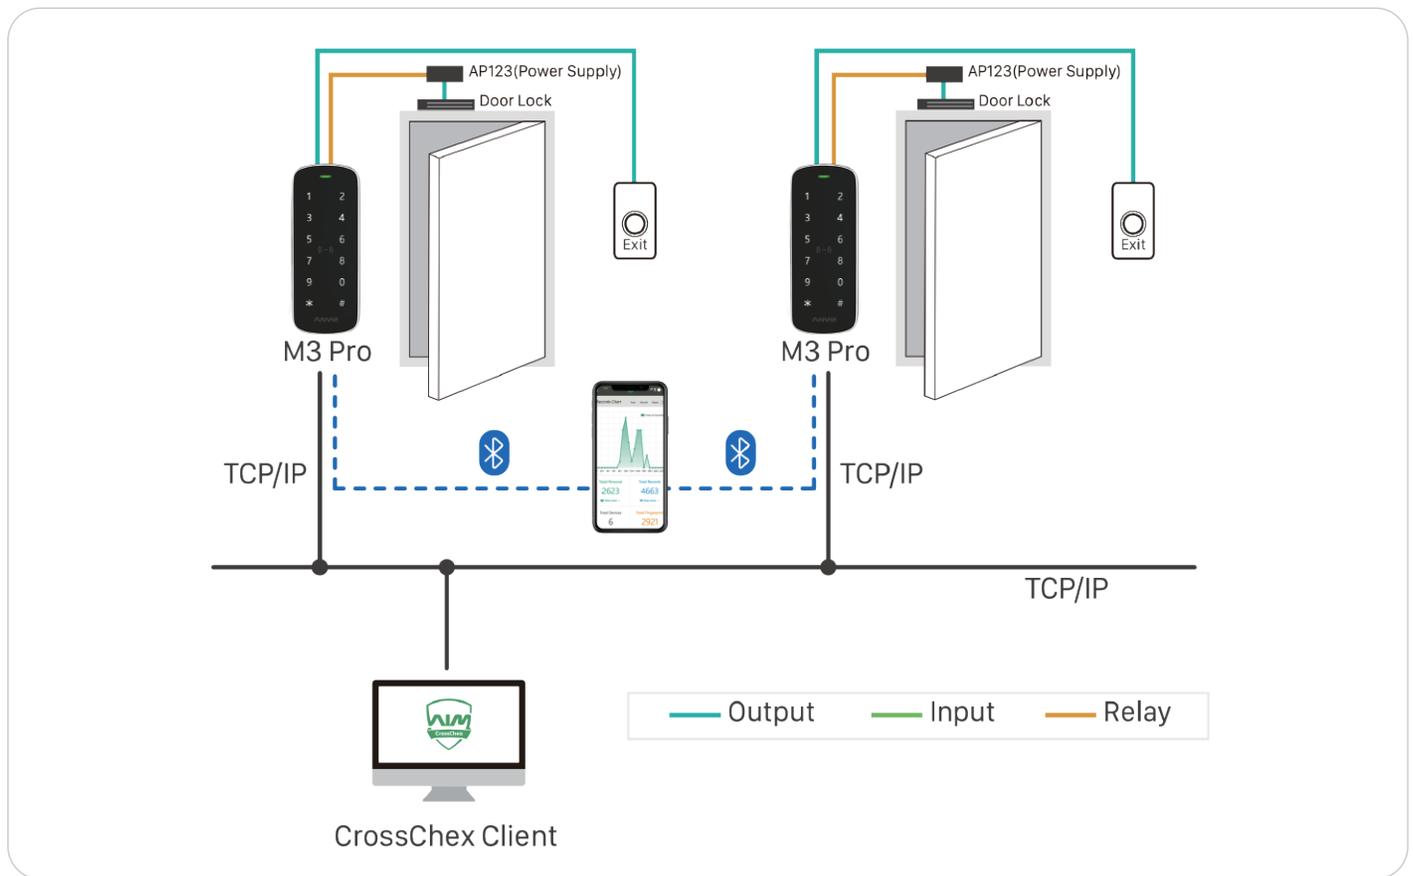

ANVIZ[®]
ntelligent . Security

Anviz Global Inc.

41656 Christy Street Fremont Blvd, Fremont, CA, USA, 94538

Tel: 408-2637700 | Toll-free: 1-855-ANVIZ4U | Inquiry: sales@anziv.com | www.anviz.com

©2019 Anviz Gloabl Inc. Anviz and identifying product names and numbers herein are registered trademarks of Anviz Global Inc. All non-Anviz brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.

Due to the consistent improvement of the product, this specification and appearance are subject to change without notice.